


# Indirect - Standard Design

120 | 150 | 180 | 210 | 250 | 300 Litres

Mixergy tanks are available as indirect or direct variants, and as vented or unvented systems. Our standard diameter tanks are available to suit the needs of most homes.



- **Unique volumetric heating**  
Only heat what you need - save up to 20% on hot water bills
- **Heat quicker**  
Delivers hot water up to 5x faster than conventional tanks
- **Constant control**  
The Mixergy App and control gauge show you how much hot water you have available at any time
- **Smart scheduling**  
Build a schedule that ensures you always have enough hot water available
- **Voice control**  
Control your Mixergy tank through your Alexa or Google Home device
- **Smart tariff ready**  
Use dynamic time-of-use tariffs to provide cheap hot water in off-peak periods
- **Energy Savings Trust verified**  
Independent verification that Mixergy tanks significantly reduce gas consumption, saving up to 21% on hot water bills



Indirect tanks are designed for use with gas or oil boilers, available as either a vented or unvented system



3kW Incoloy immersion heater for direct electric back-up and integration with smart electricity tariffs and solar PV



Heat pump ready, so you can easily connect to all makes and models of heat pump in the future



Easy connection to solar PV - either on installation or in the future



Manufactured in the UK





# Technical Data

Model	120L	150L	180L	210L	250L	300L
Product code	MX-120-IND-58X	MX-150-IND-58X	MX-180-IND-58X	MX-210-IND-58X	MX-250-IND-58X	MX-300-IND-58X
Nominal capacity (litres)	120	150	180	210	250	300
ErP rating	A	A	A	A	B	B
Insulation thickness (mm)	60	60	60	60	60	60
Immersion heater rating (kW)	3	3	3	3	3	3
Height (mm)	1050	1200	1300	1500	1800	2050
Diameter (mm)	580	580	580	580	580	580
Weight empty (kg)	44	46	51	56	62	65
Weight full (kg) *	165	195	225	265	304	360
Coil rating (kW)	12	15	19	21	21	21
Standing heat loss ** (kWh/24h)	0.54-0.86	0.54-0.91	0.54-0.96	0.54-1.01	0.54-1.34	0.54-1.68
Standing loss (W)	45	48	53	57	68	73
Minimum reheat time (15-65 °C)	11 mins	11 mins	11 mins	11 mins	14 mins	16 mins
25% charge reheat time (15-65 °C)	11 mins	11 mins	11 mins	11 mins	11 mins	13 mins
70% charge reheat time (15-65 °C)	27 mins	27 mins	25 mins	26 mins	32 mins	38 mins
100% charge reheat time (15-65 °C)	38 mins	38 mins	36 mins	38 mins	46 mins	55 mins

\* For cylinders with external heat exchanger fitted, add 5kg to the full cylinder weight

\*\* Lower value represents losses at 25% total volume heated

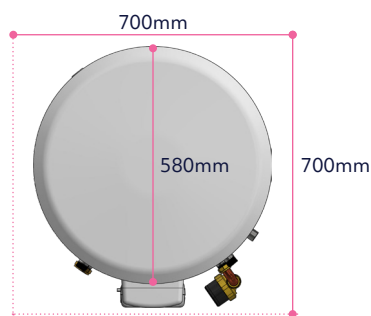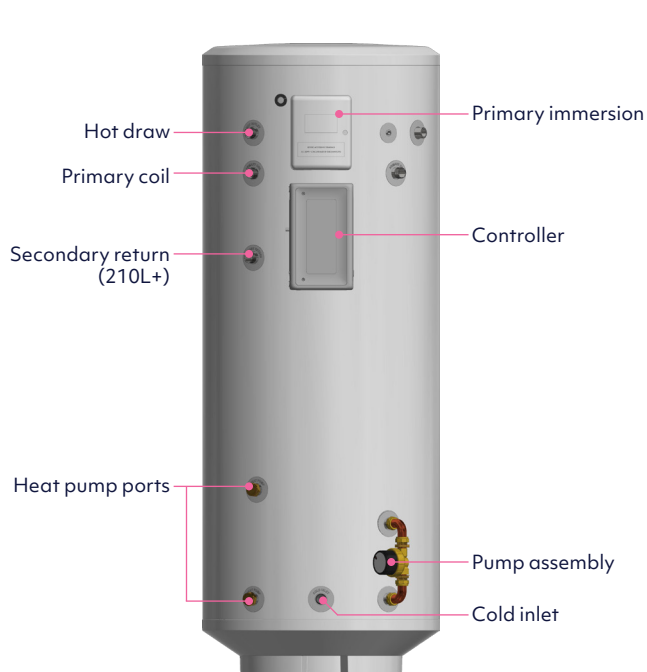

## The following components are supplied as standard:

- Unvented kit: pressure reducing valve, check valve, pressure & temperature relief valve, expansion relief valve, tundish and expansion vessel (including mounting bracket and 3/4" x 22mm adapters)
- 3 kW immersion heater(s) 1.3/4" BSP (fitted)
- High limit thermostat
- 2-port diverter valve V4043H1056
- Powerline to Ethernet adapter
- Ethernet cable
- User Guide

## HERE TO HELP

For further information or technical assistance

01865 884343

enquiries@mixergy.co.uk

www.mixergy.co.uk

